

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/025835 A1

(51) International Patent Classification: **B29C 49/48**

(21) International Application Number:
PCT/EP2004/052235

(22) International Filing Date:
17 September 2004 (17.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
RM2003A000429
17 September 2003 (17.09.2003) IT

(71) Applicant (for all designated States except US): **S.I.P.A. SOCIETÀ INDUSTRIALIZZAZIONE PROGETTAZIONE E AUTOMAZIONE S.P.A.** [IT/IT]; Via Caduti del Lavoro 3, I-31029 Vittorio Veneto (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZOPPAS, Matteo**


[IT/IT]; Via S. Pellico, 46, I-33074 Fontana Fredda (IT). **ARMELLIN, Alberto** [IT/IT]; Via Soffratta 9, I-31029 Vittorio Veneto (IT). **CHIAROTTO, Giovanni** [IT/IT]; Via Cortina 116, I-33084 Cordenons (IT). **VARASCHIN, Michele** [IT/IT]; Via Adamello 35, I-31010 Cozzuolo (IT).

(74) Agent: **GERVASI, Gemma**; Notarbartolo & Gervasi S.p.A., Corso di Porta Vittoria 9, I-20122 Milan (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: **HEATED BLOW MOULD FOR THERMOSTABILIZING TREATMENT**

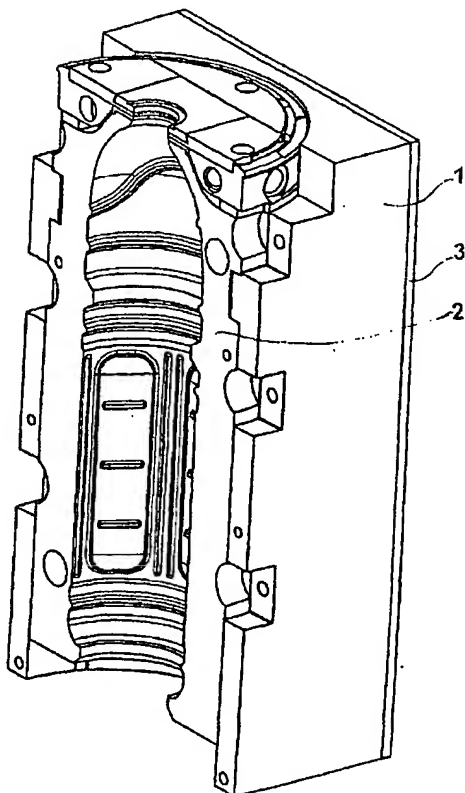

(57) Abstract: A heated blow mould for the thermostabilizing treatment, or the heat-set process, where at least a heating system is housed between the mould (2) and mould holder (3). Said system consists of a set of tubular electric resistors, which are parallel to the generator of the mould and of the item to be moulded, connected to each other by additional electric resistors, which are basically transversal in relation to the first resistors and placed in areas requiring greater heat.

WO 2005/025835 A1



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*